



GAS GRIDDLES WITH MANUAL CONTROLS



SPC: 870861
APN: 8348559

SPC

870861

871862

871896

APN

7348550

8348559

6497846

SPECIFICATIONS/FEATURES

Construction

- Stainless steel with black trim control panel.
- Stainless steel bull nose front for knob protection.
- Double wall aluminized steel side panels allows installation within 6" of combustible surface when your space is limited.
- 4 1/2" High stainless steel, wrap around splash guard to make clean up easy.
- 3 1/4" Wide grease trough.
- 4 1/2 Quart stainless steel grease drawer to catch all the excess.
- Highly polished 3/4" thick hot rolled steel griddle plate.
- Nickel plated die cast legs. Adjustable from 4" to 5 3/8" (10.2cm to 13.7cm).

Burners

- Aluminized steel 20,000 BTU burner every 12" of griddle width for maximum cooking performance.
- Controlled by a manual control valve.
- Standing pilot.

Application

- If you have quality and durability in mind, this Superior gas griddle will stand up, providing you with value and performance.
- For breakfast, lunch or dinner, your griddle will support your menu needs.

Gas Specifications

- Orifices provided for both natural and LP gas.
- Griddle comes set up for natural gas.
- Convertible gas pressure regulator is provided.
- Special orifices required for over 2000' elevation.

Specifications

Gas griddle is constructed with a stainless steel front panel and double wall aluminized steel side panels. Griddle plate to be 3/4" (1.91cm) thick highly polished steel with 4 1/2" (7.62cm) high wrap-around stainless steel splash guard. Unit has 3 1/4" (8.255cm) wide front grease trough with grease chute and a 4 1/2 qt. (4.257L) stainless steel grease drawer. Unit shall have a 20,000 BTU aluminized steel burner every 12" (30.48cm) of width and shall be controlled by a manual control. A standing pilot is provided. Griddles are supplied with 4" (10.16cm) high die cast nickel plated legs that shall have a 1 3/8" (3.5cm) adjustment. Gas connection is 1/2" (1.3cm) N.P.T. male and a convertible pressure regulator is provided. Units are approved for installation within 6" (15.2cm) of combustible surfaces and are AGA Certified NSF and CGA listed.

Warranty (USA)

- 1 Year parts and labor warranty
- For commercial use only not warranted for home use.

Specifications subject to change without notice.



SPC: 871896
APN: 6497846




Made in the U.S.A.






GAS GRIDDLES WITH MANUAL CONTROLS

SPC: 871896 APN: 6497846
 SPC: 870862 APN: 8348559
 Front Views Not Available



SPC: 870861
 APN: 7348550
 Front View

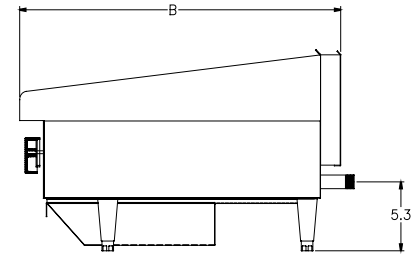

Common and Side View

ROUGH-IN DATA

SPC	APN	Dimensions W x D x H	"A" Dimension	No. Controls	BTU	Grid Area	Plate Thickness	Approximate Weight	
								Installed	Shipping
870861	7348550	24" x 27 ³ / ₄ " x 15 ¹ / ₂ " (60.96cm x 70.5cm x 39.4cm)	24"	2	40,000	498 sq. in. (3213.4 sq. cm)	³ / ₄ " (1.9cm)	165 lbs. (74.84kg)	175 lbs. (79.38kg)
870862	8348559	36" x 27 ³ / ₄ " x 15 ¹ / ₂ " (91.4cm x 70.5cm x 39.4cm)	36"	3	60,000	747 sq. in. (4819.6 sq. cm)	³ / ₄ " (1.9cm)	247 lbs. (112kg)	262 lbs. (118.8kg)
871896	6497846	48" x 27 ³ / ₄ " x 15 ¹ / ₂ " (121.9cm x 70.5cm x 39.4cm)	48"	4	80,000	996 sq. in. (6426.2 sq. cm)	³ / ₄ " (1.9cm)	330 (144.7kg)	350 (158.8kg)

Orifices provided for both natural and LP gas. 1/2"(1.3cm) N.P.T. male gas connection.

Made exclusively for Next Day Gourmet® by Star Mfg.



OPTIONAL ACCESSORIES

A. Gas Connector Kit - Quick Disconnect

❑ SPC: 801847 APN: 4346037 1/2" x 48"
 Dormont Gas Connector Kit, 68,000 Max BTU.
 Contains all of the components required for an installation to be in compliance with American National Standards. Kits contain: BPO Series stainless steel gas connector with push-to-connect quick disconnect coupling, coiled restraining device with installation mounting hardware and installation instructions, full port gas ball valve and a 90° street elbow. 48"L.

B. Grill Scraper

Redi Grill scrapers from Prince Castle keep your grills free from carbon build-up. Clean your grills quickly and safely. Heavy gauge aluminum construction for durability.

- ❑ SPC: 800671 APN: 7019185 Grill scraper
- ❑ SPC: 800673 APN: 3284270 Repl. blade

C. Lincoln Weaver® Grill Scraper

Cleans hot grills quickly and safely. Splash and hand guards protect user. Prevents carbon build-up and burnt food taste transfer from order to order. Assures better tasting food.

- ❑ SPC: 806438 APN: 9019811 Scraper
- ❑ SPC: 808077 APN: 7019821 Repl. blade

D. Sani-Safe Kitchen Tools

By Next Day Gourmet®. "Grip-Tex" poly handles reduce fatigue. NSF

- ❑ SPC: 890362 APN: 5380530 Turner, 8" x 3" perforated
- ❑ SPC: 890361 APN: 4380531 Turner, 8" x 3"

E. 3M Quick Clean Griddle System

Griddle cleaning liquid is safe for use on food contact surfaces. Each kit contains 10 packets of cleaner in pre-measured 3.2 oz. portions for cost effective cleaning, one pad holder with 12" handle, 10 griddle polishing pads and one squeegee.

- ❑ SPC: 683414 APN: 5274949 Kit
- ❑ SPC: 683415 APN: 4342739 Replacement polishing pads. 20 Per case.
- ❑ SPC: 704632 APN: 7326713 Quick clean liquid. 40 Packets per case.
- ❑ SPC: 691294 APN: 1274950 Quick cleaning liquid. 4 Qts. per case.

F. 3M Griddle Scrubber

For use on flat style grills operating at any temp. Heat resistant pad efficiently removes burnt-on food and grease. 4 Per box. Easily cleaned in dishwashers.

- ❑ SPC: 808007 APN: 1026392

G. Griddlestone

Black, soft. 8" x 4" x 3 1/2" Thick.

- ❑ SPC: 682648 APN: 1399229 Case of 12.

H. Griddle Cleaning Kit

Contains one pad holder, ten griddle pads and twenty griddle screens.

- ❑ SPC: 682190 APN: 9434028

I. Griddle Pad Holder

Grips and holds cleaning pads and screens for more efficient cleaning. High heat resistant handle.

- ❑ SPC: 682159 APN: 0223826 Single
- ❑ SPC: 682158 APN: 6411755 Case of 10

J. Griddle Pads

4" x 6" x 1/2" Thick.

- ❑ SPC: 684871 APN: 6399232 Cs. of 20 packages

K. Griddle Cleaning Screens

Use with SPC: 682159 APN: 0223826 and SPC: 684871 APN: 6399232 for easy cleaning. 20 Per package

- ❑ SPC: 684909 APN: 0828152 Single package
- ❑ SPC: 684870 APN: 7399223 Cs. of 10 packages